


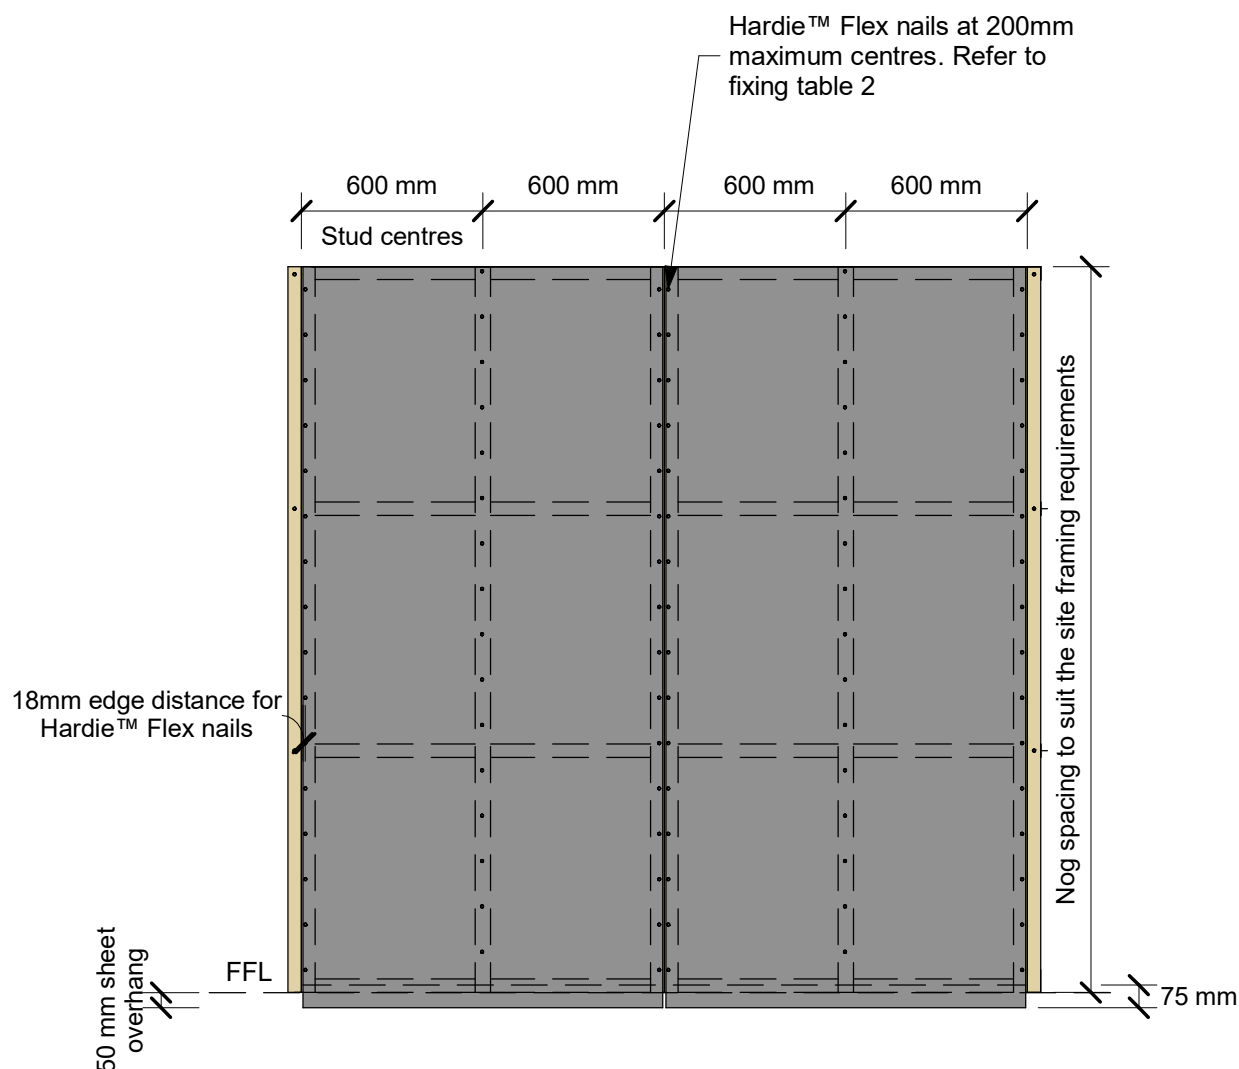

Note:

- When studs spaced at 400mm centres using Axon™ Panel Grooved 400, the nail fixings to intermediate studs to be offset 5mm from the groove in Panel.
- For fire rated wall systems by James Hardie nog spacing must be 800mm centres maximum
- For fire resistance rated wall systems, Axon™ Panel must be fixed at 150mm centres to the entire frame. Therefore top/bottom plate and nogs require suitable 150mm sloped cavity packers for the panel fixings