


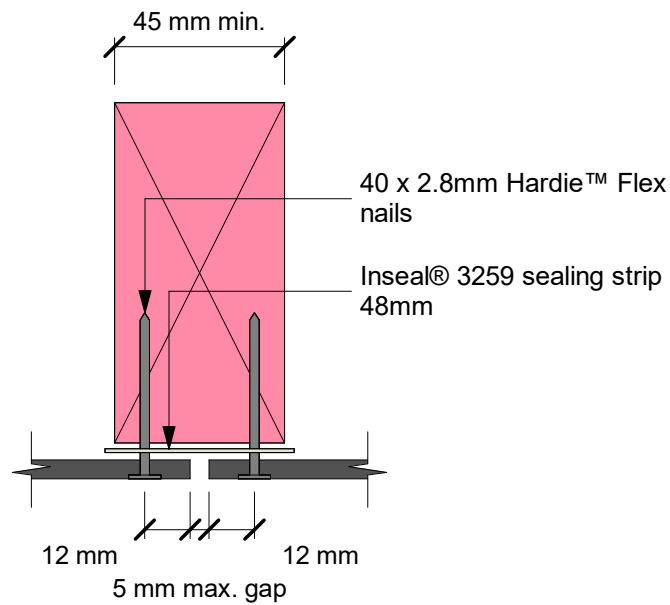

Note:

- For wider joint gaps up to 10mm, framing must be 70mm wide minimum
- The joints can be filled with paintable flexible sealant