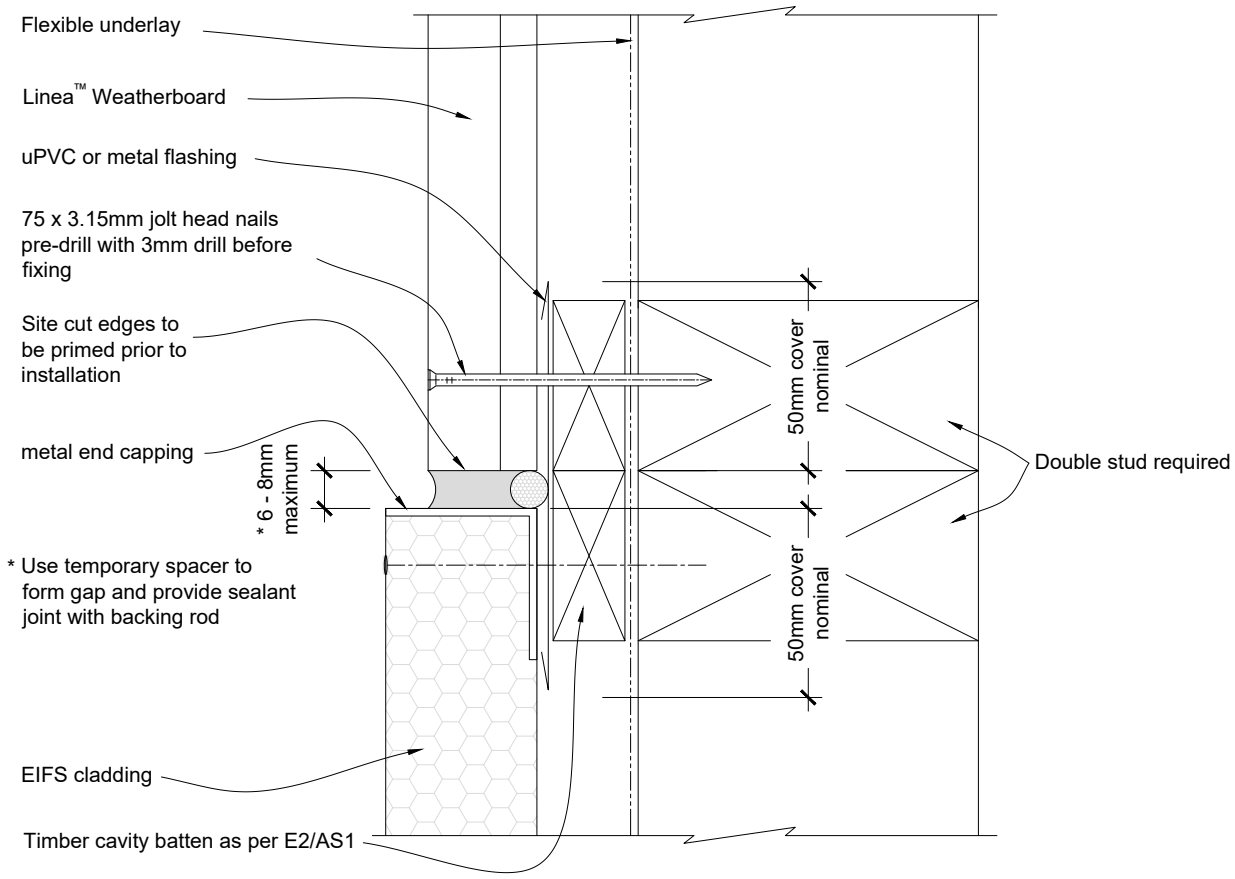
Flexible underlay
Linea™ Weatherboard
uPVC or metal flashing
75 x 3.15mm jolt head nails pre-drill with 3mm drill before fixing
Site cut edges to be primed prior to installation
metal end capping
* 6 - 8mm maximum
* Use temporary spacer to form gap and provide sealant joint with backing rod
EIFS cladding
Timber cavity batten as per E2/AS1
50mm cover nominal
50mm cover nominal
Double stud required